


## RTS SERIES

### ROOFTOP SUPPORTS

#### ROOFTOP SUPPORT

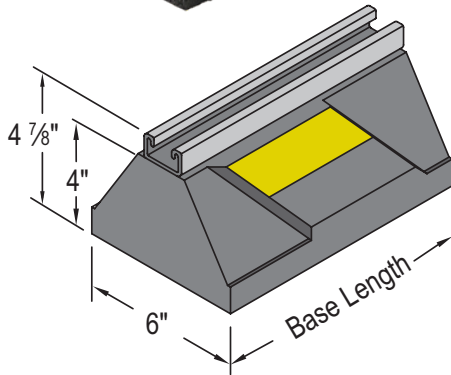

RTS Series channel support is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications.

The RTS Series is UV resistant and suitable for installation on most types of roofing material or other flat surfaces.

Model No.	Height In (mm)	Width In (mm)	Base Length In (mm)	Wt/100 pcs Lbs
RTS5	4 <sup>7</sup> / <sub>8</sub> " 124mm	6" 152mm	5" 127mm	332
RTS10	4 <sup>7</sup> / <sub>8</sub> " 124mm	6" 152mm	9.6" 244mm	530
RTS20	4 <sup>7</sup> / <sub>8</sub> " 124mm	6" 152mm	19.2" 448mm	1,123

#### Specifications:

Rubber Support with <sup>13</sup>/<sub>16</sub>" Shallow Channel

Material - 100% Recycled Rubber,  
UV Resistant

Maximum Load - 750 lbs./ft.

Channel Material & Finish Specifications			
Desc.	Code	ASTM Designation	ASTM Description
Channel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel.
Pre-Galvanized	PG	Components are cold-rolled from pre-galvanized sheet steel manufactured to the specification of ASTM A653 Grade 33 or ASTM A653 SS Grade 50. The pre-galvanized zinc coating to G-90 thickness, 0.75 MIL or 0.45 oz./sq. ft. of surface area.	

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		