


## CL050 THRU CL1200

### CLAMPS & PIPE SUPPORTS

#### CLEVIS HANGER

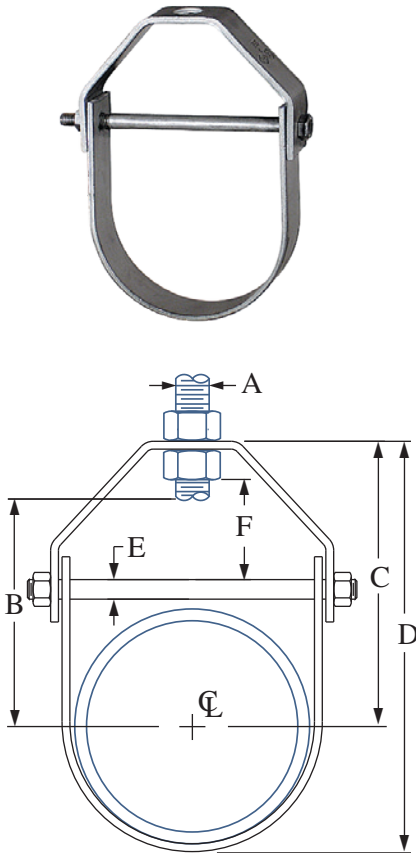

| Part No. | Iron Pipe Size | Specification Data |             |              |              |           |            |           |            | Rec. Max. Load (lbs) | App'x Wt. Per 100 (lbs) |
|----------|----------------|--------------------|-------------|--------------|--------------|-----------|------------|-----------|------------|----------------------|-------------------------|
|          |                | A                  | B           | C            | D            | E         | F          | Upper     | Lower      |                      |                         |
| CL050    | ½              | ⅜<br>9.5           | 1⅛<br>28.6  | 1⅞<br>42.9   | 2⅞<br>52.4   | ¼<br>6.4  | ⅞<br>11.1  | 13 ga x ⅞ | 13 ga x ⅞  | 610                  | 18                      |
| CL075    | ¾              | ⅜<br>9.5           | 1⅛<br>28.6  | 1⅞<br>42.9   | 2⅞<br>65.1   | ¼<br>6.4  | ⅞<br>11.1  | 13 ga x ⅞ | 13 ga x ⅞  | 610                  | 18                      |
| CL100    | 1              | ⅜<br>9.5           | 1⅞<br>33.3  | 2⅞<br>52.4   | 2⅞<br>68.3   | ¼<br>6.4  | ⅞<br>15.9  | 13 ga x ⅞ | 13 ga x ⅞  | 610                  | 22                      |
| CL125    | 1¼             | ⅜<br>9.5           | 1⅞<br>41.3  | 2⅞<br>63.5   | 3⅞<br>81.0   | ¼<br>6.4  | ⅞<br>22.2  | 13 ga x ⅞ | 13 ga x ⅞  | 610                  | 26                      |
| CL150    | 1½             | ⅜<br>9.5           | 1⅞<br>47.6  | 2⅞<br>73.0   | 3⅞<br>93.7   | ¼<br>6.4  | 1⅞<br>27.0 | 13 ga x ⅞ | 12 ga x ⅞  | 610                  | 34                      |
| CL200    | 2              | ⅜<br>9.5           | 2¼<br>57.2  | 3⅞<br>100.0  | 4⅞<br>112.7  | ¼<br>6.4  | 1¼<br>31.8 | 13 ga x ⅞ | 12 ga x ⅞  | 610                  | 38                      |
| CL250    | 2½             | ½<br>12.7          | 2⅞<br>73.0  | 4½<br>114.3  | 5⅞<br>149.2  | ⅝<br>7.9  | 1⅞<br>33.3 | 9 ga x 1⅜ | 10 ga x 1⅜ | 1130                 | 86                      |
| CL300    | 3              | ½<br>12.7          | 3⅞<br>100.0 | 4¾<br>120.7  | 6½<br>165.1  | ⅝<br>7.9  | 1¾<br>44.5 | 9 ga x 1⅜ | 10 ga x 1⅜ | 1130                 | 96                      |
| CL350    | 3½             | ½<br>12.7          | 4⅞<br>102.4 | 5⅞<br>149.2  | 7⅞<br>201.6  | ⅝<br>7.9  | 2⅞<br>65.1 | 8 ga x 1⅜ | 10 ga x 1⅜ | 1130                 | 114                     |
| CL400    | 4              | ⅝<br>15.9          | 4⅞<br>104.8 | 5⅞<br>150.8  | 8⅞<br>207.9  | ¾<br>9.5  | 2⅞<br>54.0 | 8 ga x 1⅜ | 10 ga x 1⅜ | 1430                 | 126                     |
| CL500    | 5              | ⅝<br>15.9          | 4⅞<br>106.4 | 5⅞<br>144.5  | 8⅞<br>214.3  | ½<br>12.7 | 1⅞<br>36.5 | 4 ga x 1¼ | 8 ga x 1¼  | 1430                 | 204                     |
| CL600    | 6              | ¾<br>19.1          | 5⅞<br>128.6 | 6⅞<br>173.0  | 10⅞<br>257.2 | ½<br>12.7 | 1¾<br>44.5 | 3 ga x 1½ | 8 ga x 1½  | 1940                 | 280                     |
| CL800    | 8              | ¾<br>19.1          | 6⅞<br>157.2 | 8⅞<br>204.8  | 12⅞<br>315.9 | ⅝<br>15.9 | 1⅞<br>47.6 | 3 ga x 1¾ | 8 ga x 1¾  | 2000                 | 446                     |
| CL1000   | 10             | ⅞<br>22.2          | 7¾<br>196.9 | 10<br>254.0  | 15⅞<br>392.1 | ¾<br>19.1 | 2¼<br>57.2 | ¾ x 1¾    | 3 ga x 1¾  | 3600                 | 806                     |
| CL1200   | 12             | ⅞<br>22.2          | 9⅞<br>229.6 | 11⅞<br>293.7 | 18<br>457.2  | ¾<br>19.1 | 2⅞<br>71.4 | ¾ x 2     | 8 ga x 2   | 3800                 | 1034                    |

Materials & Finishes: EG

| Material Specifications |                 |                      |                                                                                                                    |
|-------------------------|-----------------|----------------------|--------------------------------------------------------------------------------------------------------------------|
| Material                | Material Code   | ASTM Designation     | ASTM Description                                                                                                   |
| Steel:                  | Use Finish Code | ASTM A1011 SS GR 33. | UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga. |

| Finish Specifications |             |                                                                                                                                                                                                       |
|-----------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Finish                | Finish Code | Description                                                                                                                                                                                           |
| Zinc Electroplated    | EG          | Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part. |

| PROJECT INFORMATION:  |        | APPROVAL STAMP: |  |  |  |
|-----------------------|--------|-----------------|--|--|--|
| Project:              |        |                 |  |  |  |
| Date:                 | Phone: |                 |  |  |  |
| Architect / Engineer: |        |                 |  |  |  |
| Contractor:           |        |                 |  |  |  |
| Address:              |        |                 |  |  |  |
| Notes 1:              |        |                 |  |  |  |