


CSA158

1 5/8" X 1 5/8" X 14 GA.

Slotted Angle
LIGHT DUTY.

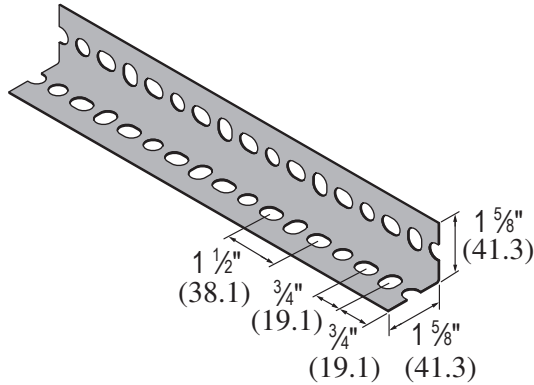

For those jobs where extra strength is not necessary. Ideal for light-duty shelving or racking.

Materials & Finishes: PG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Channel Finish Specifications		
Finish	Finish Code	Description
Pre-Galvanized	PG	Components are cold-rolled from pre-galvanized sheet steel manufactured to the specification requirements of ASTM A653 Grade 33 or ASTM A653 SS Grade 50. The pre-galvanized zinc coating to G-90 thickness, 0.75 MIL or 0.45 oz./sq. ft. of surface area.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		