



GF1649AS & GF1650AS

BEAM CLAMPS

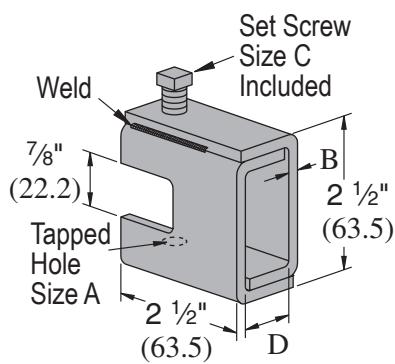

Part Number	"A" In	"B" In (mm)	"C" In	"D" In (mm)	Wt/100 pcs Lbs	Design Load Lbs
GF1649AS	3/8- 16	9.5 3.2	7/8 x 1 1/2	22.2	67	650
GF1650AS	1/2- 13	13/16 4.8	1/2 x 1 1/2	23.8	100	1,100

For beams under 7/8" (22.2) thick flange

Weld is not continuous it is either 1-1/4" (31.8) - 1-3/4" (44.5) long or 2 spot welds. All welds are on the top and bottom

Materials & Finishes: EG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		