


GF2263, GF2265, GF2267

ANGLE FITTINGS

Wt/100pcs: 78 Lbs

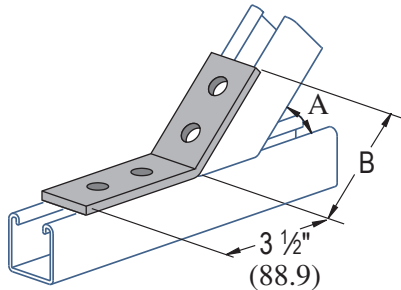

Part Number	"A" Degree (rad)	"B" In (mm)
GF2263	30° 0.52	3 ¹¹ / ₁₆ 93.7
GF2265	45° 0.79	3 ¹¹ / ₁₆ 93.7
GF2267	60° 1.05	3 ¹¹ / ₁₆ 93.7

Standard Dimensions for 1⁵/₈" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: ⁹/₁₆" (14.3mm); Hole Spacing - From End: ¹³/₁₆" (20.6mm); Hole Spacing - On Center: 1⁷/₈" (47.6mm); Width: 1⁵/₈" (41.3mm); Thickness: ¹/₄" (6.4mm)

Materials & Finishes: EG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		