
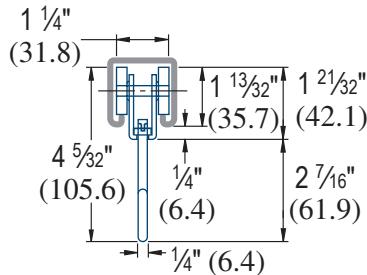


GF2751 & GF2751N_†

TROLLEYS

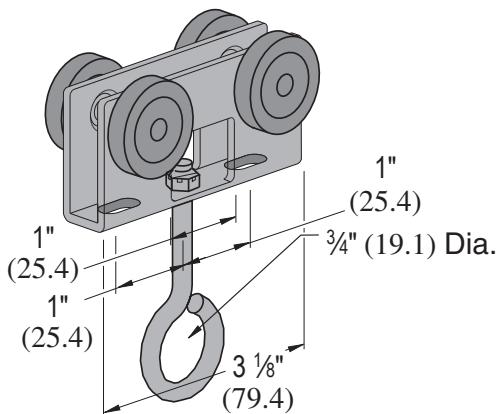

| Part Number | Design Load Lbs | Wt/100 pcs Lbs |
|-------------|-----------------|----------------|
| GF2751 | 100 | 63 |
| GF2751N | 20 | 40 |

Clevis Material: 12 gauge

† "N" indicates acetal wheels

Standard Dimensions for 1 5/8" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1 1/8" (47.6mm); Width: 1 5/8" (41.3mm); Thickness: 1/4" (6.4mm)

Note : When used for mechanical supports, load capacities of brackets and fittings should be in compliance with the American Standard Code for Pressure Piping.

Materials & Finishes: EG

| Material Specifications | | | |
|-------------------------|-----------------|-------------------------|---|
| Material | Material Code | ASTM Designation | ASTM Description |
| Steel: | Use Finish Code | ASTM A1011 SS GR 33. | UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga. |

| Finish Specifications | | |
|-----------------------|-------------|---|
| Finish | Finish Code | Description |
| Zinc Electroplated | EG | Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part. |

| PROJECT INFORMATION: | | APPROVAL STAMP: |
|------------------------------|--------|-----------------|
| Project: | | |
| Date: | Phone: | |
| Architect / Engineer: | | |
| Contractor: | | |
| Address: | | |
| Notes 1: | | |