



## GF2941 & GF2942

### POST BASES

Wt/100pcs: 358 Lbs



(GF2942 Shown)

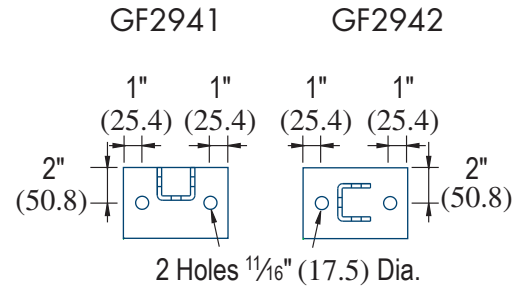

Standard Dimensions for 1<sup>5</sup>/<sub>8</sub>" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: <sup>9</sup>/<sub>16</sub>" (14.3mm); Hole Spacing - From End: <sup>13</sup>/<sub>16</sub>" (20.6mm); Hole Spacing - On Center: 1<sup>7</sup>/<sub>8</sub>" (47.6mm); Width: 1<sup>5</sup>/<sub>8</sub>" (41.3mm); Thickness: <sup>1</sup>/<sub>4</sub>" (6.4mm)

#### Materials & Finishes: EG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		