


RH050 THRU RH800

CLAMPS & PIPE SUPPORTS

RING HANGER

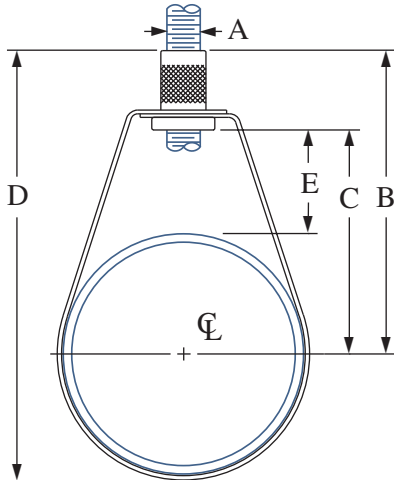

Part No.	Iron Pipe Size	Specification Data					Rec. Max. Load (lbs)	UL - ULC Test Load	App'x Wt. Per 100 (lbs)
		A	B	C	D	E			
RH050	1/2	3/8 9.5	2 15/16 74.6	1 7/8 47.6	3 3/8 85.7	1 1/16 36.5	400	750	9
RH075	3/4	3/8 9.5	2 7/8 73.0	1 7/8 47.6	3 3/8 85.7	1 11/32 42.9	400	750	9
RH100	1	3/8 9.5	2 7/8 73.0	1 7/8 47.6	3 1/2 88.9	1 7/32 309.6	400	750	9
RH125	1 1/4	3/8 9.5	3 1/16 77.8	1 5/16 49.2	3 7/8 98.4	1 1/8 28.6	400	750	10
RH150	1 1/2	3/8 9.5	3 3/16 81.0	2 1/8 54.0	4 1/8 104.8	1 3/16 30.2	400	750	11
RH200	2	3/8 9.5	3 7/16 87.3	2 1/8 61.9	4 3/8 117.5	1 1/4 31.8	400	750	12
RH250	2 1/2	3/8 9.5	3 13/16 96.8	2 3/4 69.9	5 1/4 133.4	1 3/8 34.9	600	850	28
RH300	3	3/8 9.5	4 101.6	3 76.2	5 3/4 146.1	1 1/4 31.8	600	1050	30
RH400	4	3/8 9.5	4 3/4 120.7	3 3/4 95.3	7 177.8	1 1/2 38.1	1000	1500	37
RH500	5	1/2 12.7	6 152.4	4 3/4 120.7	8 3/4 222.3	1 5/16 49.2	1000	2000	83
RH600	6	1/2 12.7	6 9/16 135.9	5 1/4 133.4	9 7/8 250.8	1 5/16 49.2	1250	2650	95
RH800	8	1/2 12.7	7 13/16 198.4	6 5/8 168.3	12 1/8 307.9	2 5/16 58.7	1250	4050	118

Materials & Finishes: EG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part.

PROJECT INFORMATION:		APPROVAL STAMP:	
Project:			
Date:	Phone:		
Architect / Engineer:			
Contractor:			
Address:			
Notes 1:			