


Telespar Sign Support System

SIGN POSTS

Length: 10', 12', 20', & 24'

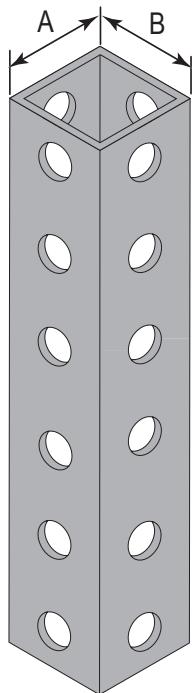

Part Number	Gauge	"A" In. (mm)	"B" In. (mm)
14F12	12	1½"	1½"
16F12		38.1	38.1
20F12		1¾"	1¾"
22F12		44.5	44.5
24F12		2"	2"
16D12		50.8	50.8
		2¼"	2¼"
		57.2	57.2
		2½"	2½"
		63.5	63.5
		1¾"	1¾"
		44.5	44.5

Materials & Finishes: PG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Channel Finish Specifications		
Finish	Finish Code	Description
Pre-Galvanized	PG	Components are cold-rolled from pre-galvanized sheet steel manufactured to the specification requirements of ASTM A653 Grade 33 or ASTM A653 SS Grade 50. The pre-galvanized zinc coating to G-90 thickness, 0.75 MIL or 0.45 oz./sq. ft. of surface area.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		