


RC050 THRU RC1200

CLAMPS & PIPE SUPPORTS

RISER CLAMP

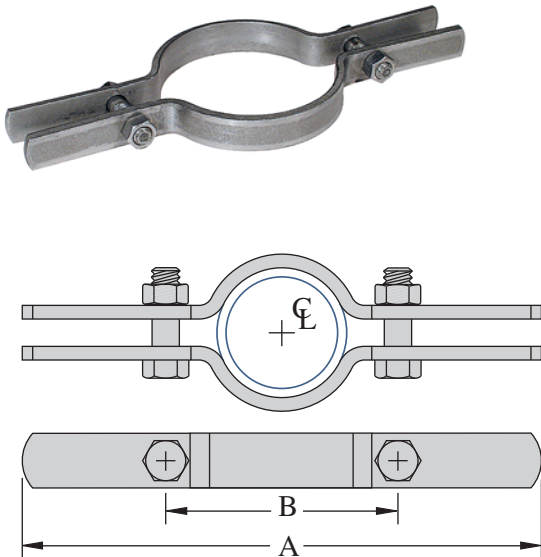

Part No.	Iron Pipe Size	Specification Data				Rec. Max. Load (lbs)	App'x Wt. Per 100 (lbs)
		A	B	Bolt Diameter	Material		
RC050	1/2	8 5/8 219.1	2 1/8 54.0	3/8 9.5	8 ga x 1	220	88
RC075	3/4	8 13/16 223.8	2 5/16 58.7	3/8 9.5	8 ga x 1	220	92
RC100	1	9 1/16 230.2	2 5/8 66.7	3/8 9.5	8 ga x 1	220	94
RC125	1 1/4	9 7/16 239.7	2 15/16 74.6	3/8 9.5	8 ga x 1	250	100
RC150	1 1/2	10 254.0	3 1/16 87.3	3/8 9.5	8 ga x 1	250	104
RC200	2	10 9/16 268.3	4 101.6	3/8 9.5	8 ga x 1	300	114
RC250	2 1/2	11 1/8 282.6	4 9/16 115.9	3/8 9.5	3 ga x 1	400	160
RC300	3	11 13/16 300.0	5 1/4 133.4	3/8 9.5	3 ga x 1	500	170
RC350	3 1/2	13 330.2	6 152.4	1/2 12.7	3 ga x 1	600	206
RC400	4	13 5/8 295.3	6 5/8 168.3	1/2 12.7	3 ga x 1	750	220
RC500	5	14 1/8 358.8	7 5/8 163.7	1/2 12.7	3 ga x 1 1/2	1500	340
RC600	6	15 3/8 390.5	8 5/8 225.4	1/2 12.7	3 ga x 1 1/2	1600	372
RC800	8	18 5/8 473.1	12 304.8	5/8 15.9	3/4 x 1 1/2	2500	722
RC1000	10	21 533.4	14 1/2 368.3	5/8 15.9	3/4 x 2	2500	1094
RC1200	12	22 3/4 577.8	17 431.8	5/8 15.9	1/2 x 2	2700	1610

Materials & Finishes: EG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		