


GF1546 & GF2097

ANGLE FITTINGS

Wt/100pcs: 58 Lbs

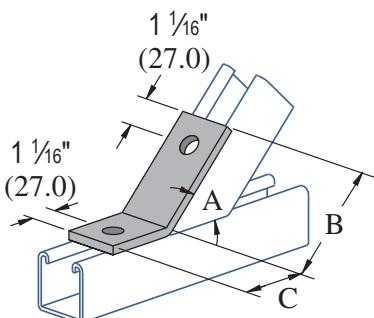

Part No.	"A" Degree (rad)	"B" In (mm)	"C" In (mm)
GF1546	45° 0.79	3 76.2	2 5/16 58.7
GF2097	60° 1.05	3 3/8 85.7	1 7/8 47.6

Standard Dimensions for 1 5/8" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: 9/16" (14.3mm); Hole Spacing - From End: 13/16" (20.6mm); Hole Spacing - On Center: 1 7/8" (47.6mm); Width: 1 5/8" (41.3mm); Thickness: 1/4" (6.4mm)

Materials & Finishes: EG, HG, SS

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.
[Stainless Steel:	SS304	A 240 TYPE 304	Heat resisting chromium and chromium-nickel stainless steel plate, sheet, strip for pressure vessel.
	SS316	A 240 TYPE 316	

Finish Specifications		
Finish	Finish Code	Description
Zinc Electroplated	EG	Zinc electroplating is used to coat plain steel. The electroplating process requires that the component be immersed in a solution containing zinc ions that are deposited on the surface of the part. Electroplated zinc is shiny and smooth, and is suitable for indoor environments with low relative humidity.
Hot Dip Galvanized After Fabrication	HG	Components are fabricated from plain steel meeting the specification requirements of ASTM A1011 and hot dipped galvanized after fabrication. Hot dip galvanizing is performed to the specification requirements of ASTM A123. The zinc coating is typically 2.6 MIL or 1.5 oz./sq. ft. of surface area.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		