
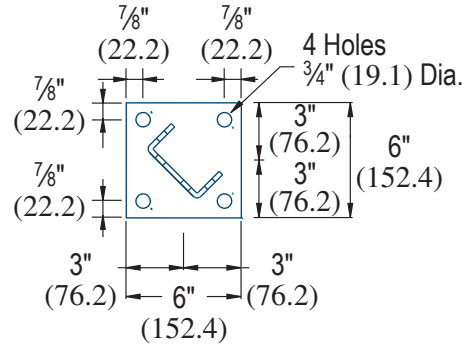


## GF2073A

### POST BASES

Wt/100pcs: 408 Lbs

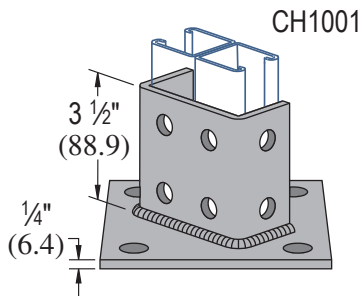

Standard Dimensions for 1<sup>5</sup>/<sub>8</sub>" (41.3mm) width series channel fittings (Unless Otherwise Shown on Drawing)

Hole Diameter: <sup>9</sup>/<sub>16</sub>" (14.3mm); Hole Spacing - From End: <sup>13</sup>/<sub>16</sub>" (20.6mm); Hole Spacing - On Center: 1<sup>7</sup>/<sub>8</sub>" (47.6mm); Width: 1<sup>5</sup>/<sub>8</sub>" (41.3mm); Thickness: <sup>1</sup>/<sub>4</sub>" (6.4mm)

#### Materials & Finishes: HG

Material Specifications			
Material	Material Code	ASTM Designation	ASTM Description
Steel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel. 12 Ga., 14 Ga. & 16 Ga.

Finish Specifications		
Finish	Finish Code	Description
Hot Dip Galvanized After Fabrication	HG	Components are fabricated from plain steel meeting the specification requirements of ASTM A1011 and hot dipped galvanized after fabrication. Hot dip galvanizing is performed to the specification requirements of ASTM A123. The zinc coating is typically 2.6 MIL or 1.5 oz./sq. ft. of surface area.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		