

## RTS 10-12

## ROOFTOP SUPPORTS

## ROOFTOP 12" EXTENDED SUPPORT W/10" STRUT



## Specifications:


Rubber Support with Threaded Rod Risers &  
13/16" Galvanized Shallow Channel

Material - 100% recycled rubber, UV resistant

Maximum Load - 150 lbs./ft.

RTS-Extension Series channel support is designed for superior support of gas and refrigeration piping systems, cable tray, electrical conduit, multiple lines, HVAC equipment and many other applications.

The RTS-Extension Series is UV resistant and suitable for installation on most types of roofing material or other flat surfaces.

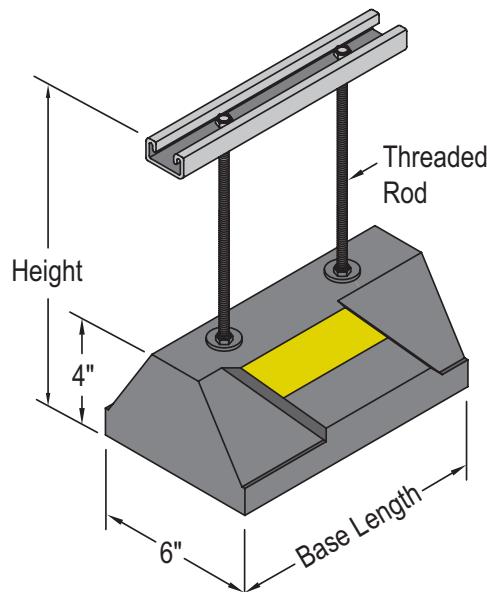

Model No.	Height In (mm)	Width In (mm)	Base Length In (mm)	Wt/100 pcs Lbs
RTS10-12	12" 305mm	6" 152mm	9.6" 244mm	650

Channel Material & Finish Specifications			
Desc.	Code	ASTM Designation	ASTM Description
Channel:	Use Finish Code	ASTM A1011 SS GR 33.	UBS channels are accurately and carefully cold formed to size from low-carbon strip steel.
Pre- Galvanized	PG		Components are cold-rolled from pre-galvanized sheet steel manufactured to the specification of ASTM A653 Grade 33 or ASTM A653 SS Grade 50. The pre-galvanized zinc coating to G-90 thickness, 0.75 MIL or 0.45 oz./sq. ft. of surface area.

PROJECT INFORMATION:		APPROVAL STAMP:
Project:		
Date:	Phone:	
Architect / Engineer:		
Contractor:		
Address:		
Notes 1:		